

Electrical Test Program – Connection of Components



The arrows (Figure 1) indicate the direction of the information or activation.

The following signals are carried by the serial interface K1:


Outside air temperature, engine coolant temperature, vehicle speed, engine speed (RPM), instrument cluster illumination (circuit 58d), °F/°C, acceleration recognition, A/C compressor emergency shut off.

The following signals are carried by the serial interface K2:

Idle speed stabilization
Refrigerant pressure

Figure 1

- A1 Instrument cluster
- A9 A/C compressor
- B12 Refrigerant pressure sensor
- B12/1 Refrigerant temperature sensor
- B11/4 ECT sensor (DFI, IFI)
- L5 CKP sensor
- N3 Injection system control module
- N47 Traction system control module
- N10/2 Combination relay module
- N22 A/C pushbutton control module
- N65/1 AIR control module
- M4 Auxiliary fan

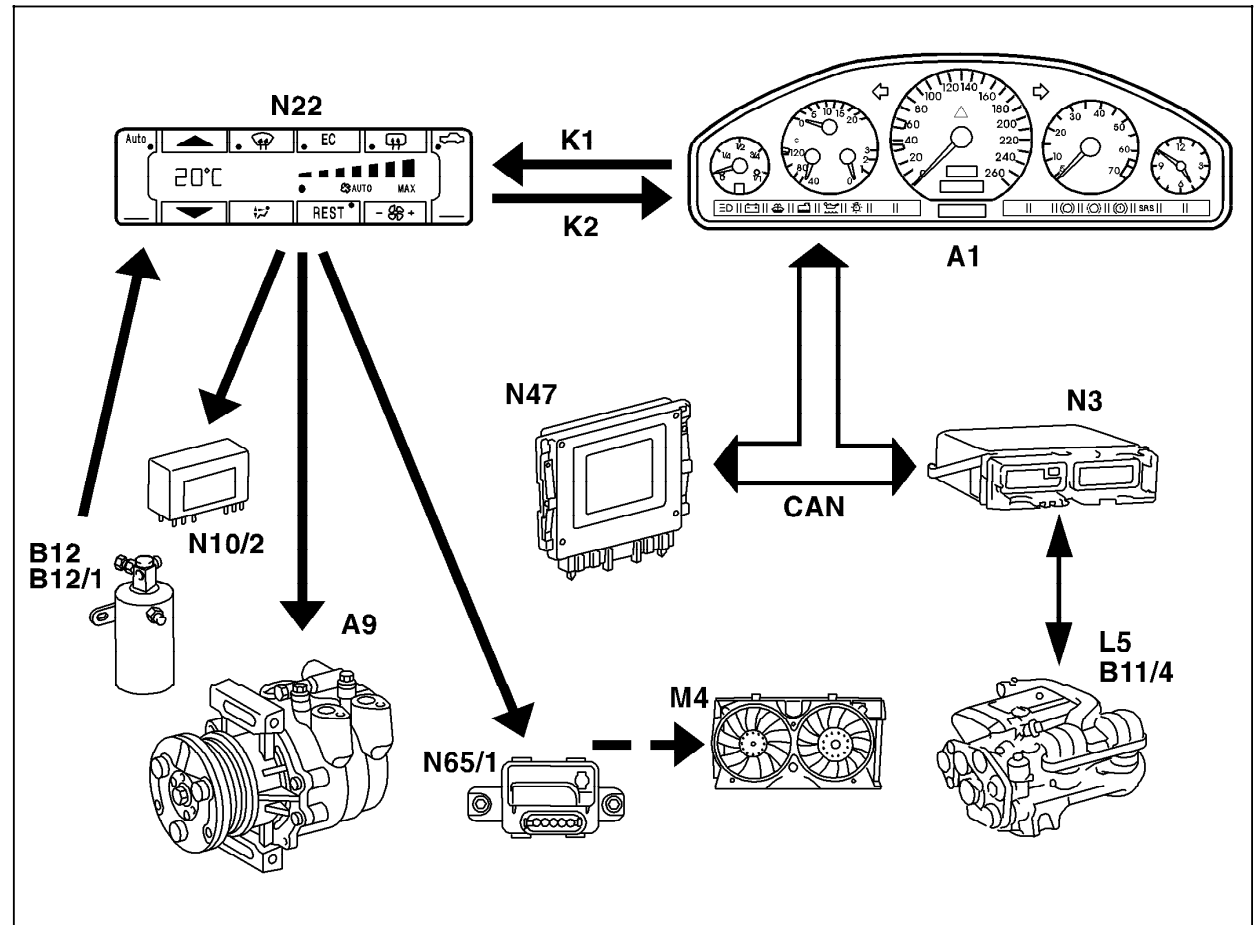

P83.40-2047-06